



# Door Access Reader

## DESCRIPTION



**RFID media or  
PIN code as a  
door key.**

**Illuminated  
keypad.**

**Audio and  
visual  
signalization.**

- **Reads RFID Tickets as door keys**
- **Different RFID Media supported as ticket**
- **Audio and visual signalisation**
- **Illuminated keypad**

Door Access Reader and Door Access Reader Combo are user interface devices for Door Access Controller. Together they form a one or two-way check point in Metra Access Control Systems and Electronic Locking Systems.

In Access Control Systems a RFID media is used as a door key. For higher security (e.g. outside door, etc.) a user specific PIN code as an addition to RFID media can be used.


In Electronic locking systems a RFID media or a locker number followed by a locker's PIN code can be used as a door key.

Keypad design and audio signalization on the Door Access Reader Combo makes it suitable for blind and visually impaired people.

Device is normally mounted near door where passage control is needed.

## TECHNICAL DATA:

- Power obtained from Door Access Controller; Cannot operate as standalone component
- Power consumption 12 V DC / 0.1 A
- 3 Wire power & network connection to Metra Door Access Controller
- Front mask in glossy black colour with silver aluminium frame
- Supports different RFID Media (see order codes bellow)
- 12 key keypad (Combo model only)
- Audio signalization
- Visual signalization
- Temperature operating range: -10 °C up to +50 °C
- Dimensions in mm (w/h/d): 89 / 147.2 / 37

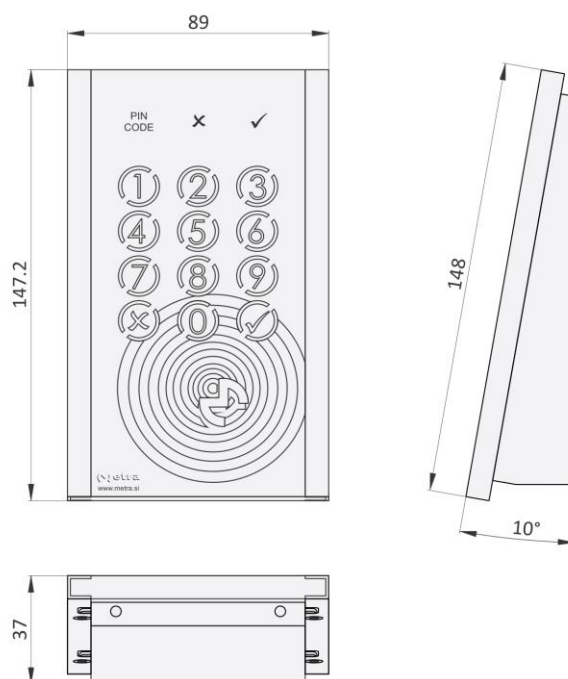

## HOW TO ORDER?

| 1   | 2 | 3  | 4    |
|-----|---|----|------|
| DAR | C | IS | -    |
|     | - | MF | _XXX |

### Example:

**DARCIS** – Metra Door Access Reader Combo that reads all ISO 15693/14443AB compatible RFID Media.

### Column 1:

Product Group

DAR ... Door Access Reader

### Column 2:

Reader option

|   |   |
|---|---|
| C | (Combo) RFID media reader and 12-key keypad |
| - | RFID media reader only                      |

**Column 3:**

Reader option

|    |  |
|----|--|
| IS | ISO reader 13.56 MHz. Reads all ISO15693 and ISO14443 A/B compatible RFID Media. |
| MF | Mifare reader. Reads all ISO14443 A/B compatible RFID Media.                     |

**Column 4:**

Colour combination

|      |  |
|------|--|
| -    | Standard colour combination (glossy black foil with grey aluminium frame).     |
| _XXX | Reserved for additional colour coding. Contact Metra sales for colour options. |

**ORDER CODES:****Door Access Reader**

ORDER CODE:

**DAR\_\*****Note:***\*For order codes see previous page!***Door Access Reader Combo**

ORDER CODE:

**DARC\_\*****Note:***\*For order codes see previous page!*